

LEDVANCE.COM/EN-US



LEDVANCE

ARCHITECTURAL LINEAR


THE NEW LOOK OF VERSATILITY
AND PERFORMANCE





CONTENTS

INTRODUCTION	3
WALKAROUND – DIRECT/INDIRECT	4-5
WALKAROUND – DIRECT	6-7
ACCESSORIES	8-13
CONNECTORS AND SENSORS	8-9
MOUNTING	10-11
LENSES	12-13
RESOURCES	14-15

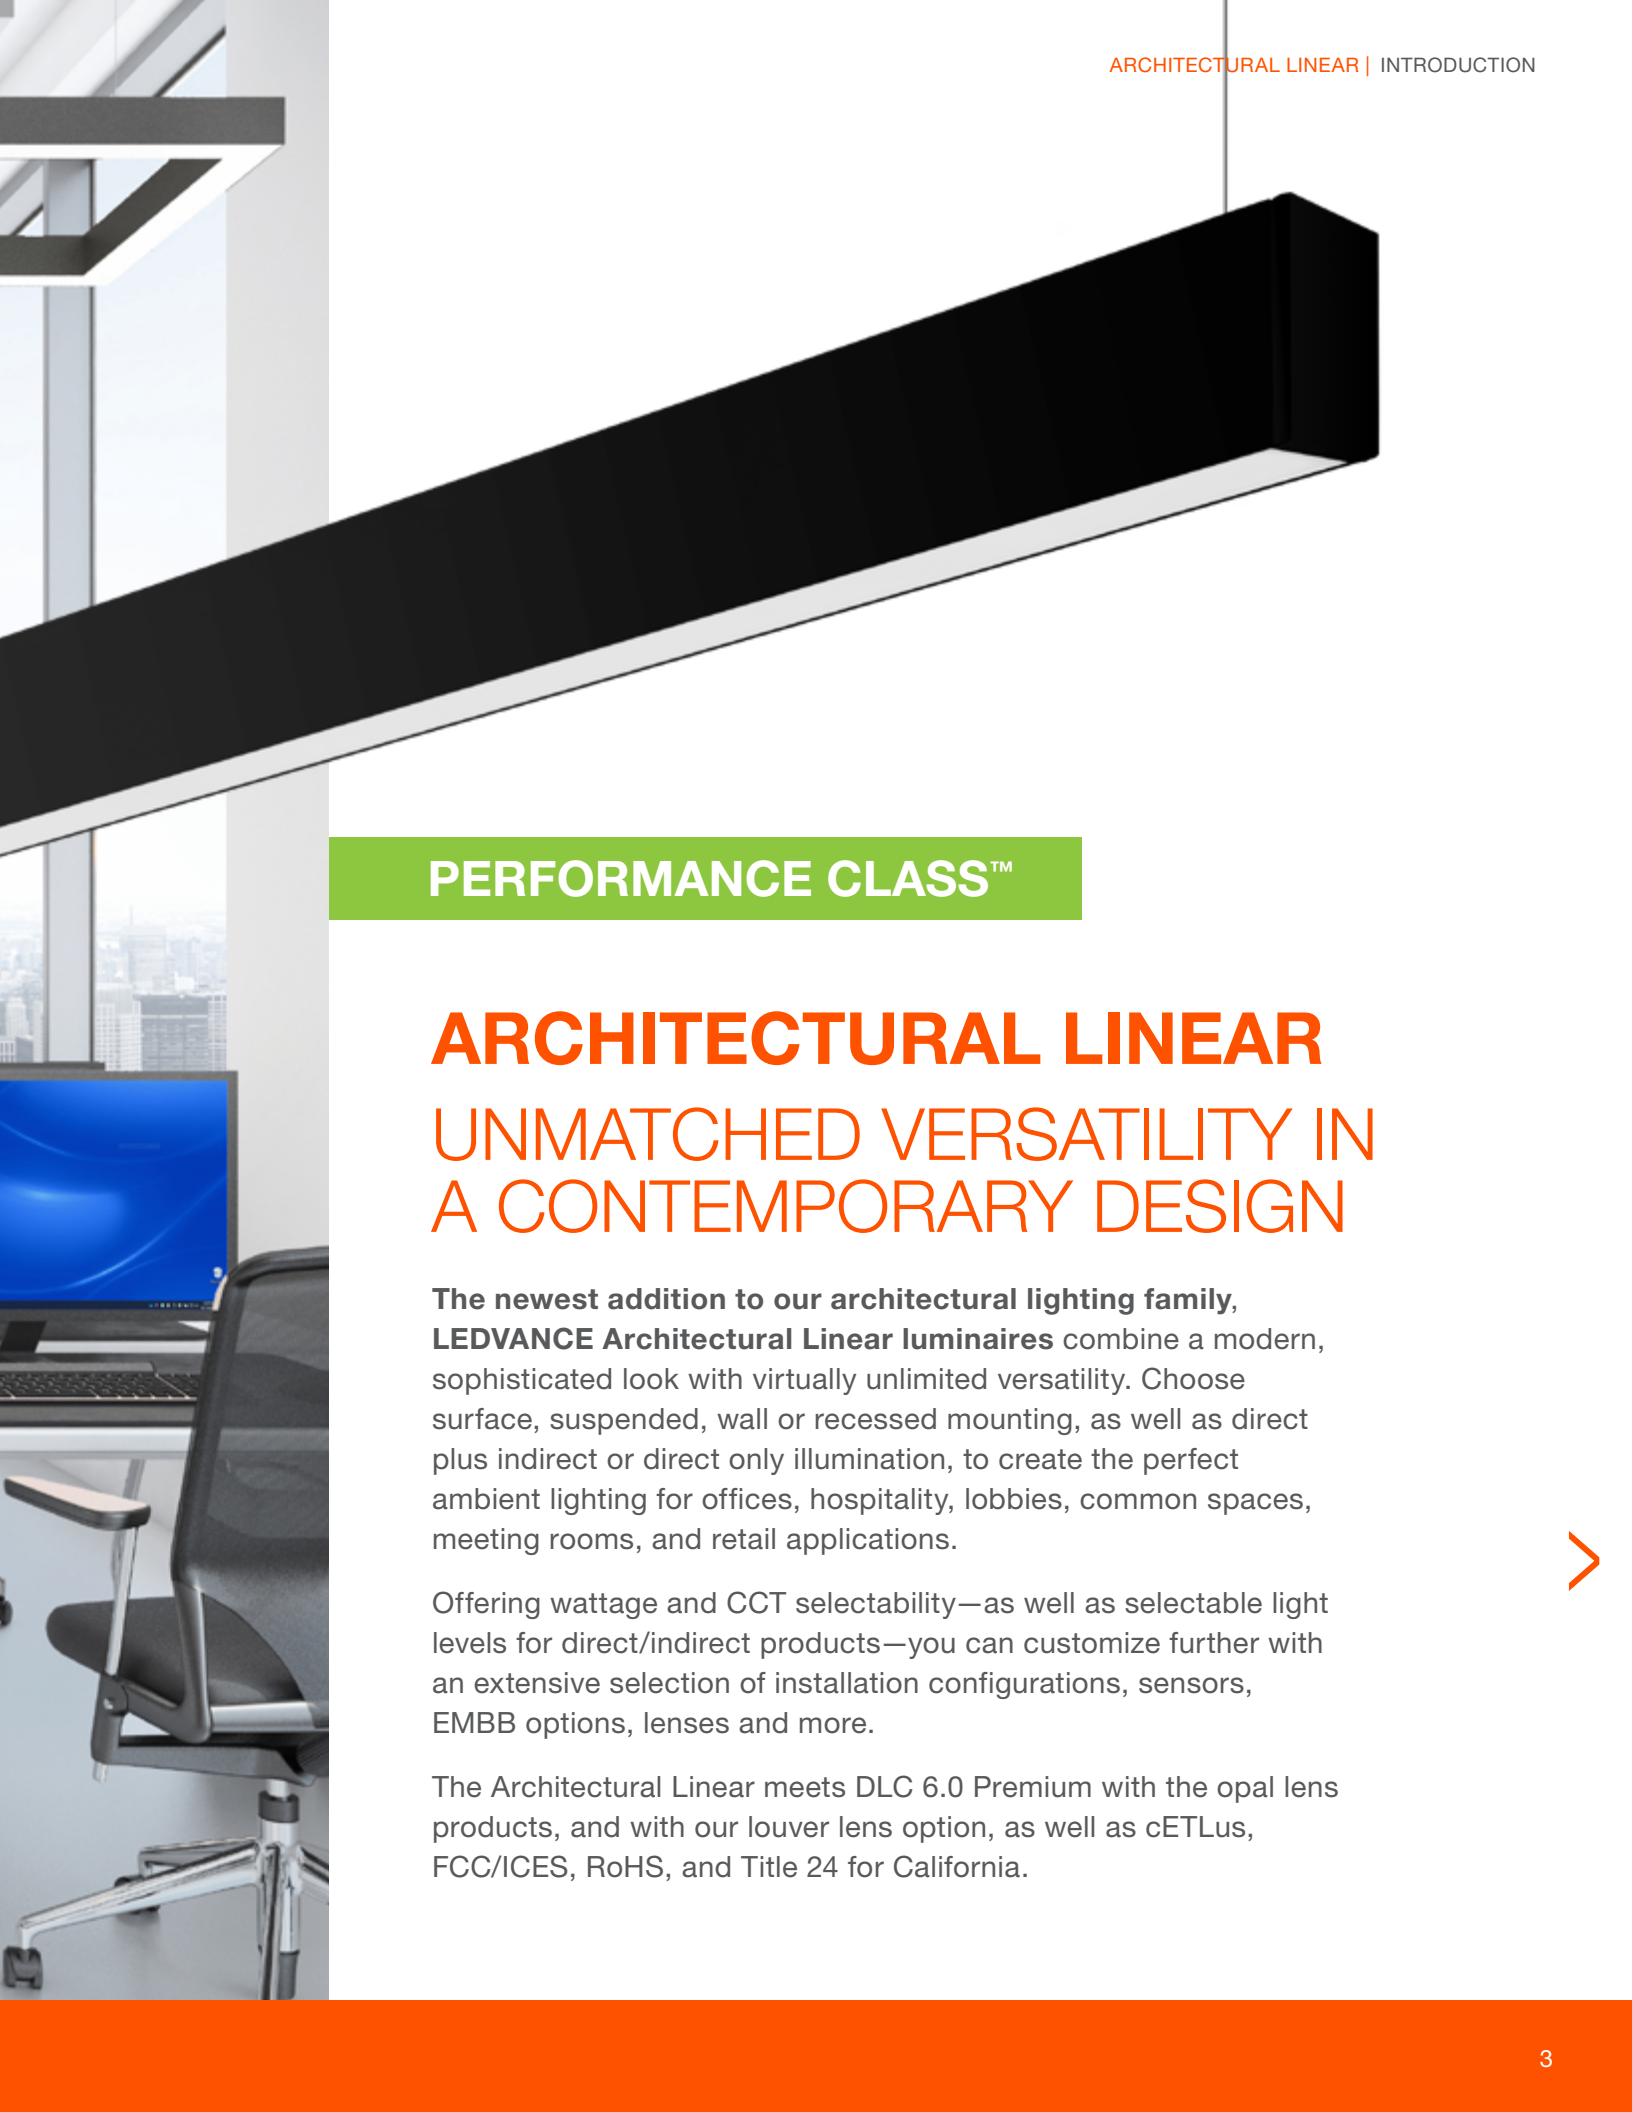

PERFORMANCE CLASS™

ARCHITECTURAL LINEAR UNMATCHED VERSATILITY IN A CONTEMPORARY DESIGN

The newest addition to our architectural lighting family, **LEDVANCE Architectural Linear luminaires** combine a modern, sophisticated look with virtually unlimited versatility. Choose surface, suspended, wall or recessed mounting, as well as direct plus indirect or direct only illumination, to create the perfect ambient lighting for offices, hospitality, lobbies, common spaces, meeting rooms, and retail applications.

Offering wattage and CCT selectability—as well as selectable light levels for direct/indirect products—you can customize further with an extensive selection of installation configurations, sensors, EMBB options, lenses and more.

The Architectural Linear meets DLC 6.0 Premium with the opal lens products, and with our louver lens option, as well as cETLus, FCC/ICES, RoHS, and Title 24 for California.



FLEXIBILITY, FUNCTIONALITY, BALANCE

DIRECT/INDIRECT

Many modern spaces are enhanced by incorporating both direct and indirect lighting. Direct luminaires provide excellent functional lighting; indirect lighting adds comfort and aesthetic appeal.

Combining both lighting types can create an environment that's not only practical and efficient, but also visually captivating.

MADE TO ORDER

SUSTAINABILITY

Replacement up-light modules for the direct/indirect luminaires are available through warranty replacement for product failures. Replacement drivers are also available for these items. Minimize entire fixture replacement with this easy in-field switch.



INSTALLATION

Can be wall or suspended mounted; standard suspended mounting hardware included in the box



SIZES

Three sizes: 2FT, 4FT and 8FT; luminaire can be connected to produce longer runs (max 600W)

FINISHES

Three finishes: White and Black standard; Silver available PTO (Purchase To Order)

VOLTAGE

120-347V for US and Canadian market needs

LIGHT LEVELS

Control Up/Down light distribution with five preset levels: 100/0%, 70/30%, 50/50%, 30/70%, 0/100%

HOUSING & LENSES

Opal lens (acrylic/PMMA) comes pre-installed (or choose from other available lens options); aluminum/iron housing; UGR <30

SELECTABILITY

Switches located on top of the fixture for CCT and Wattage selectability and Up/Down light distribution

CONVENIENT KNOCKOUTS

Four knockouts located on top of the fixture to support multiple installation methods

BEAM ANGLE

Direct: 110° beam angle (non-directional) with opal lens

Indirect: 120° beam angle (non-directional)

CUSTOMIZATION

LEDVANCE MTO (Made To Order) options include EMBB, sensor installation, and more

SCAN OR CLICK
TO VIEW THE
SPEC SHEET



VERSATILITY MEETS PERFORMANCE

DIRECT

LEDVANCE Architectural Linear luminaires also excel in situations where simple direct lighting is called for. The combination of wattage and CCT selectability, plus an extensive choice of mounting options, accessories and configuration possibilities ensures an appealing, efficient and effective solution for residential and commercial applications of all kinds.

MADE TO
 ORDER

SELECTABILITY

Switches located on top of the fixture for CCT and Wattage selectability

CONVENIENT KNOCKOUTS

Four knockouts located on top of the fixture to support multiple installation methods

SIZES

Three sizes: 2FT, 4FT and 8FT; luminaire can be connected to produce longer runs (max 600W)

FINISHES

Three finishes: White and Black standard; Silver available PTO (Purchase To Order)

VOLTAGE

120-347V for US and Canadian market needs

INSTALLATION

Can be wall or suspended mounted;
standard suspended mounting
hardware included in the box



*Simple surface mounting kit
for DIRECT luminaires only*

HOUSING & LENSES

Opal lens (acrylic/PMMA) comes pre-installed
(or choose from other available lens options);
aluminum/iron housing; UGR <30

BEAM ANGLE

110° beam angle
(non-directional)
with opal lens

CUSTOMIZATION

LEDVANCE MTO (Made To Order)
options include EMBB, sensor
installation, and more

**SCAN OR CLICK
TO VIEW THE
SPEC SHEET**



CUSTOMIZE YOUR INSTALLATION

Create unique Architectural Linear configurations—squares, rectangles, grids, honeycombs, hexagons and more! Linking the luminaires is quick and easy, and you can mix and match lengths to reach your optimal run, up to 600W. It's also a snap to add sensors.

EMBB options, available via LEDVANCE MTO, are seamlessly and invisibly integrated into the luminaire to preserve the sleek, modern look.

CONNECTORS



X-CONNECTOR




Y-CONNECTOR



T-CONNECTOR




L-CONNECTOR

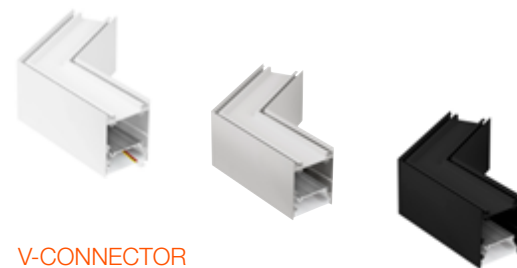

V-CONNECTOR


SENSORS

CONNECTING ARCHITECTURAL LINEAR

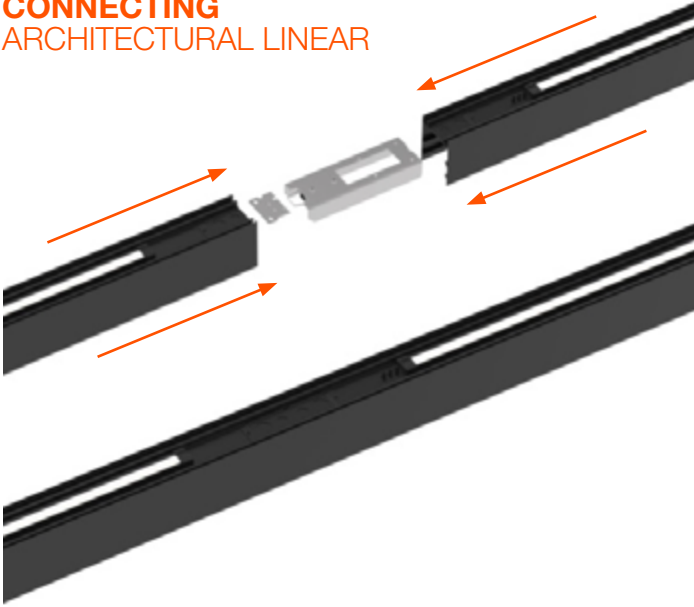

CONNECTOR BRACKET

Sold separately

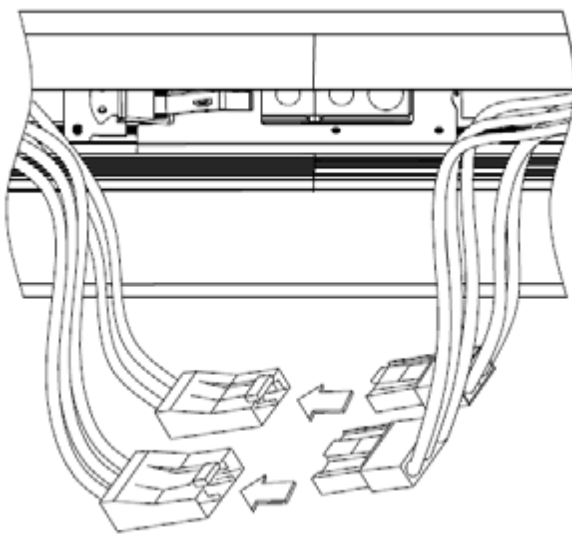

Quick connect terminals located inside the luminaire allow for easy wiring.

OPTIONAL LINK, LUTRON, AND STANDALONE PIR SENSORS

The Architectural Linear features standalone and networked lighting control options via LEDVANCE MTO. This includes LEDVANCE LINK™ Networked Lighting Controls, as well as Lutron Vive and standalone PIR sensors.

To allow a seamless and unobtrusive installation, sensors are integrated into an extended end cap that replaces the standard end cap supplied with the luminaire. The end cap brackets are available in all three finishes.



LINK 



LUTRON



STANDALONE
PIR SENSOR

SUSPENDED MOUNTING

SUSPENDED MOUNT KIT **POWER FEED**



SUSPENDED MOUNT KIT **NON-POWER FEED**



SUSPENDED MOUNT KIT **T-GRID**



NOTE: Some kits will vary in hardware quantity due to the size of the kit

MOUNTING OPTIONS IN EVERY STYLE

All Architectural Linear luminaires will come with a simple suspended mounting kit, included in the box; the direct luminaires also include a simple surface mounting kit. Beyond the basics, there are options for just about any suspended, surface, recessed and wall mount installation in all types of ceiling materials, including drywall, concrete, T-grid and wooden frames.



SURFACE MOUNTING


SURFACE MOUNT KIT **POWER FEED**



SURFACE MOUNT KIT **WOODEN FRAME/DRYWALL/CONCRETE**



SURFACE MOUNT KIT **T-GRID**

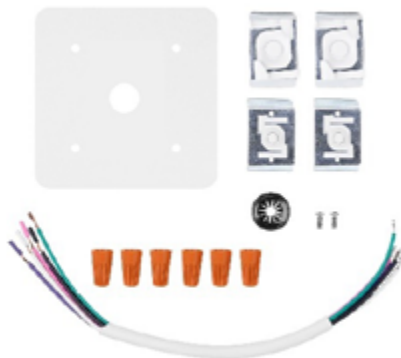


RECESSED MOUNTING


RECESSED MOUNT KIT **T-GRID FRONT INSTALLATION**



RECESSED MOUNT KIT **T-GRID SIDE INSTALLATION**



RECESSED MOUNT KIT **DRYWALL MUD-IN**

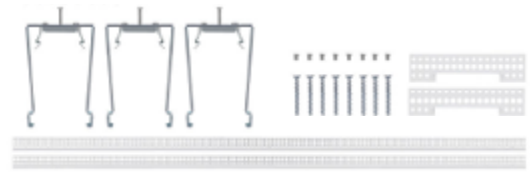

RECESSED MOUNT FLANGE KIT **DRYWALL**



WALL MOUNTING

WALL MOUNT KIT **STATIC BRACKET**



WALL MOUNT KIT **ROTATABLE BRACKET**



NOTE: Some kits will vary in hardware quantity due to the size of the kit

LENSES



LENSES FOR EVERY APPLICATION


Different applications may require different downlighting treatments—and with five available lenses, you can be sure of getting the exact right optics for the job. The opal lens is standard; baffle, louver (in black or white), honeycomb, and micro-prismatic lenses are also available in all three lengths. For continuous linear runs, you may also request any lens option in pre-cut lengths via a MTO option.

OPAL*




**Standard with all items*

MICRO PRISMATIC

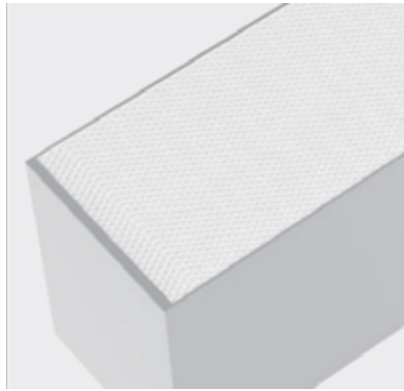


LOUVER*

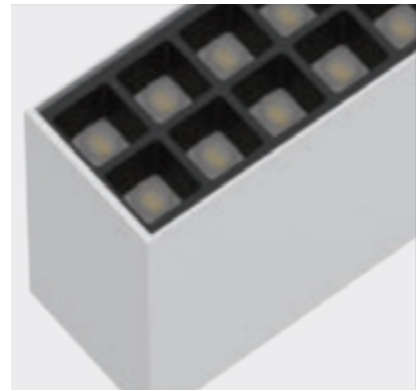


**Also available in white*

BAFFLE

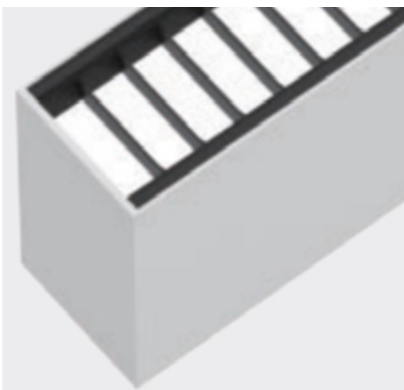

HONEYCOMB

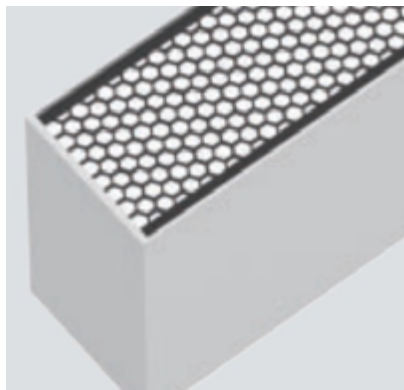


ROLLABLE LENS*



**Available for MTO requests (In Opal)*




SLEEK, SOPHISTICATED, DESIGNED TO IMPRESS

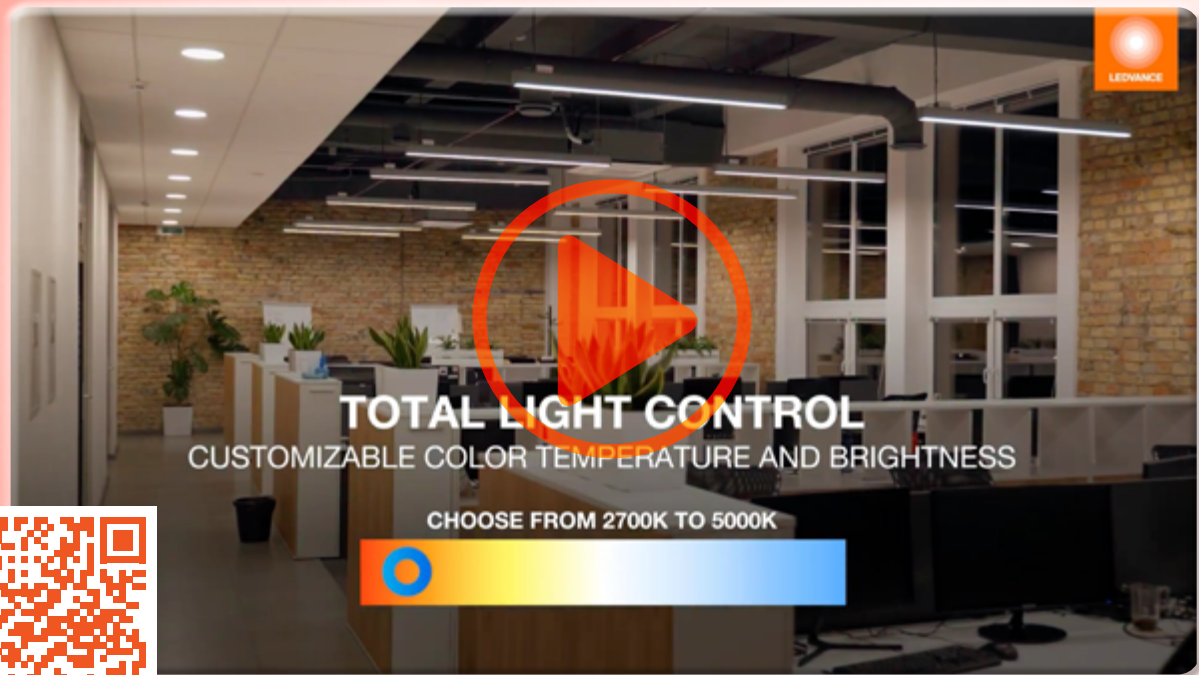

WATCH NOW

DISCOVER ALL THE
**ARCHITECTURAL
LINEAR** PRODUCT
OFFERINGS ONLINE

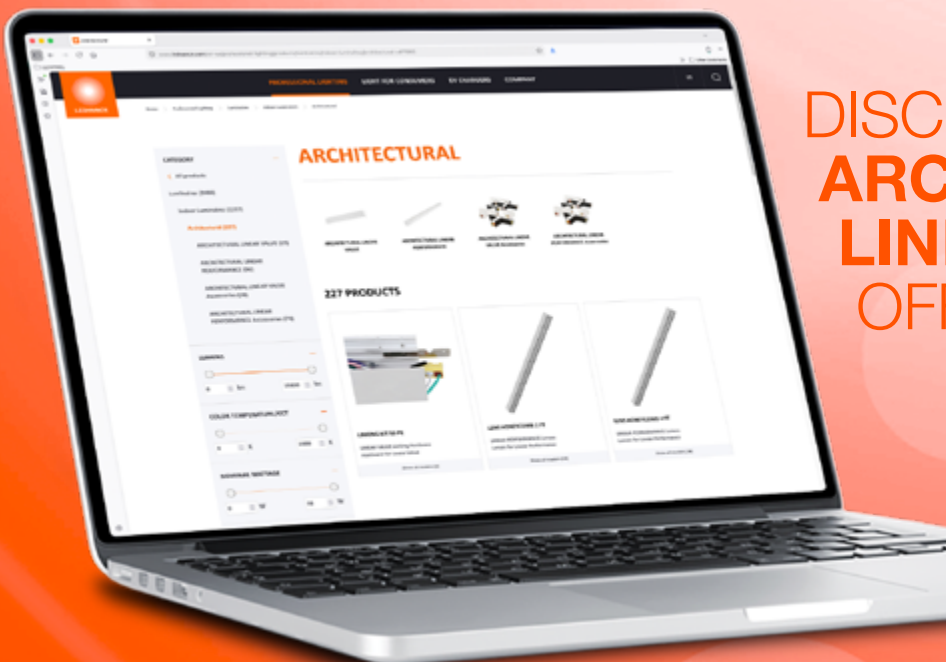

EXPLORE MORE LEDVANCE PRODUCTS




DOWNLOAD THE
"ALL" PRODUCTS CATALOG



LEARN ABOUT BREAKTHROUGH
OPTI-SELECT TECHNOLOGY

VISIT OUR **RESOURCES** LANDING PAGE

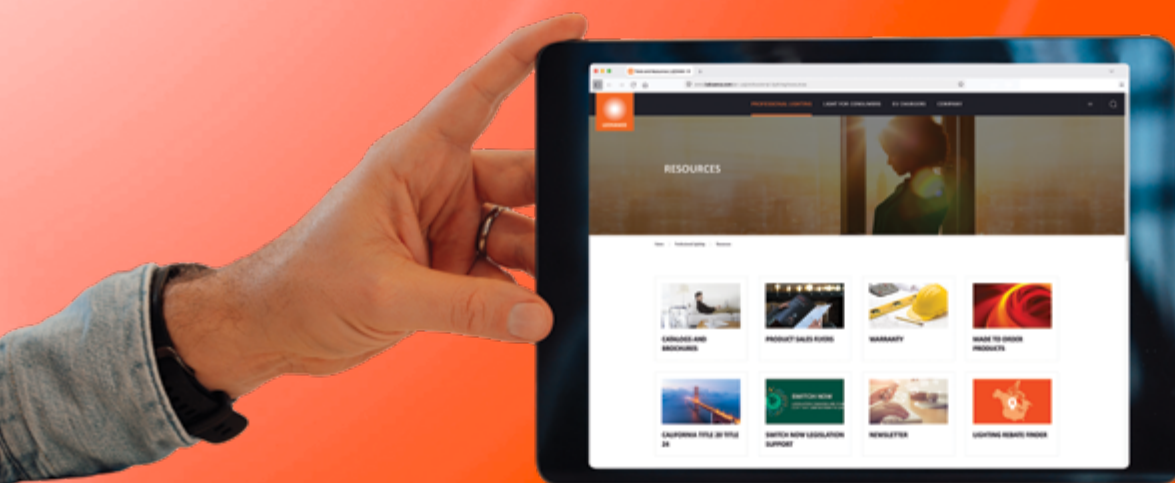

DOWNLOAD CATALOGS, BROCHURES, SPEC SHEETS, AND MORE



LEDVANCE

LEDVANCE LLC

181 Ballardvale Street, Suite 203

Wilmington, MA 01887 USA

Phone 1-800-654-0089

LEDVANCE.COM/EN-US



LEDVANCE and SYLVANIA are registered trademarks.
The Bluetooth® word mark and logos are registered trademarks
owned by the Bluetooth SIG, Inc. and any use of such marks by
LEDVANCE LLC is under license. All other trademarks are those of
their respective owners. Licensee of product trademark SYLVANIA
in general lighting. Specifications subject to change without notice.

© 2026 LEDVANCE LLC

IC-ARCHLIN-BRCHE R1 5-26