







THE NEW TRACKLIGHT PORTFOLIO

WHETHER IN STORES, RESTAURANTS OR OFFICES, THE NEW LEDVANCE TRACKLIGHTS GIVE EVERY ENVIRONMENT THE LIGHT IT DESERVES – RELIABLY, FLEXIBLY AND ALWAYS SPOT ON.

Light is more than just brightness – it's about staging, atmosphere and motivation. LEDVANCE has developed the TRACKLIGHT portfolio for this very purpose; a versatile product family that combines modern LED technology with maximum flexibility.

- TRACKLIGHT SPOT ZOOM DIM: built-in dimming and zooming allows you to
 precisely adjust the lighting to each sales area from wide light diffusion to pinpoint
 accentuation.
- TRACKLIGHT XR: maximum flexibility thanks to replaceable reflectors with 15°, 36° or 50° beam angles – also available in DALI and high-efficiency versions.
- TRACKLIGHT SPECIAL FOOD LED: featuring an optimised spectrum for appetising colour brilliance – from crisp vegetables to freshly baked bread.
- TRACKLIGHT SPOT GU10: the clever and economical solution for retail and hospitality – easy to install, delivering convincing results.



DISCOVER MORE Discover our new portfolio at: ledvance.com/ tracklights



ALWAYS THE RIGHT FIT - OUR VERSATILE MOUNTING OPTIONS







Recessed mounting



Pendant mounting









YOUR BENEFITS AT A GLANCE

FLEXIBLE AND ADAPTABLE –

a portfolio that covers a

wide range of applications


HIGH-QUALITY LIGHTING
PERFORMANCE – with excellent
colour rendering (up to CRI 90+)
and optimised light spectrums

APPLICATION-ORIENTED DESIGN –
with tailor-made versions for a
number of different lighting projects

EFFICIENCY & EASE OF USE –
energy-saving LED technology
combined with fast installation

ACCESSORIES - A PERFECT MATCH

Alongside our LED tracklights, we also offer the matching rails and accessories – including live end connectors and T-connectors – for a seamless installation and maximum flexibility.

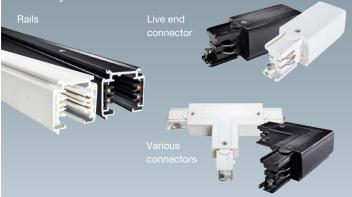






Flexibility at its finest. The TRACKLIGHT SPOT ZOOM DIM allows you to adjust the beam angle, brightness and light colour – always precisely and independently of one another. Its modern, sleek design ensures it looks great in any setting.





- ZOOM & DIM beam angle and light intensity separately adjustable
- MULTI COLOUR simple choice between 3000 K and 4000 K
- FLICKER FREE thanks to special electronic control gear
- FLEXIBLE LIGHTING a luminaire for a wide range of sales and exhibition spaces

FLEXIBLE ZOOMING







The built-in mechanical zoom lens allows you to change the beam angle from 18° to 50° depending on your needs.

FLEXIBLE DIMMING





Using a potentiometer, you can dim the light intensity directly on the luminaire (3 % to 100 %)





SINGLE CCT

CCT switch: no

- Im/W: 120

- UGR: < 19

- Beam angle: 18-50°



CCT SWITCH

- CCT switch: yes

- Im/W: 80

- UGR: <24

- Beam angle: 21-50°

FLEXIBLE ILLUMINATION





The MULTI COLOUR function allows you to change the light colour (3 000 K or 4 000 K) very easily on the luminaire.

PERFECT LIGHT IS ALL ABOUT THE ANGLE


The light distribution of the luminaires can be adapted to suit individual needs using different beam angles.






Perfect distribution – the light distribution spectrum at 3000 K.





Great variation – the different bear angles at 4000 K

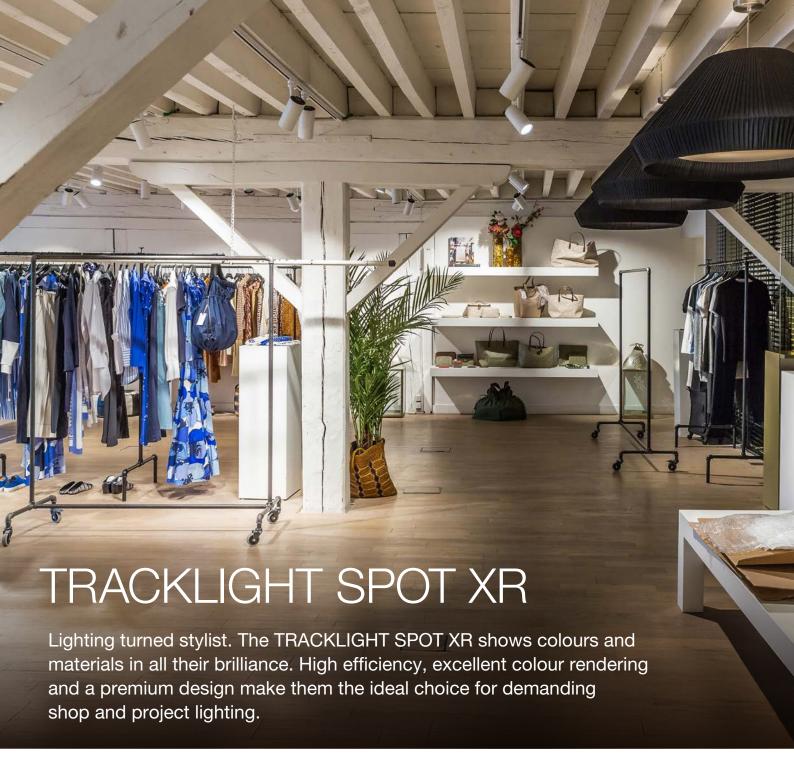




KEY FEATURES

- EXCHANGEABLE REFLECTORS with 15°, 36° or 50° beam angles
- SIMPLE REFLECTOR REPLACEMENT twist, replace, done
- DALI VERSION intelligent control and energy-saving operation
- HIGH-EFFICIENCY VERSION ideal for sustainable lighting projects

The DALI versions are easy and quick to integrate into existing light management systems.



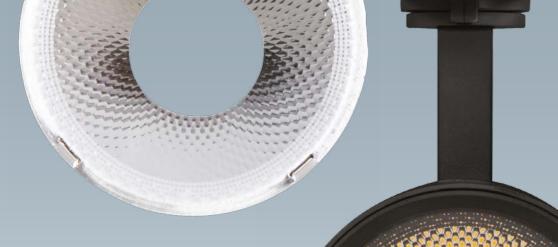

FAMILY VERSIONS



TRACKLIGHT SPOT VALUE XR

- Exchangeable reflector 24°
- CCT available: 3000 K and 4000 K
- Power: 20W and 30W
- 120 lm/W
- CRI: ≥90
- Spare parts reflector: 15°, 36°, 50°
- SDCM: <3</p>
- 8 products + 6 reflectors



TRACKLIGHT SPOT VALUE XR DALI

- Exchangeable reflector high efficiency 24°
- CCT available: 3000 K and 4000 K
- Power: 30 W
- 120 lm/W
- CRI: ≥90
- Spare parts reflector: 15°, 36°, 50°
- SDCM: <3</p>
- 4 products + 6 reflectors






TRACKLIGHT SPOT VALUE XR HE


- Exchangeable reflector high efficiency 24°
- CCT available: $3\,000\,K$ and $4\,000\,K$
- Power: 30 W
- 130 lm/W
- CRI: ≥90
- SDCM: <5</p>
- 4 products

EXCHANGEABLE REFLECTOR

Smart and simple. Thanks to the practical bayonet connection and the rubber suction cup, the reflectors of the TRACKLIGHT SPOT XR can be replaced quickly.







... the reflectors quick and easy





TRACKLIGHT SPECIAL FOOD LED

You eat – and shop – with your eyes. That's why the TRACKLIGHT SPECIAL FOOD LED makes meat, fish, bread and vegetables shine. Thanks to optimised light spectrums, steaks appear juicier, crusts crispier and fruit fresher – for picture-perfect presentations that stimulate your appetite.







KEY FEATURES

- Reflector: 24°
- Power: 30W
- COB: for meat and fish, bread and vegetables
 - · Meat: 65 lm/W
 - · Bread: 75 lm/W
 - · Vegetables: 95 lm/W
- CRI
 - · Standard ≥90
 - · Meat > 70
- SDCM:
 - · Meat < 28
 - · Bread < 7
 - · Vegetables < 6
- 10 products

LIGHT YOU CAN ALMOST TASTE



Meat – warm white light with a high red component makes red look richer and meat look juicy.



Fish – 3500 K–4000 K with blue accentuation for radiant freshness and a defined structure.



Bread – approx. 2700 K with yellow and red components makes golden brown crusts appear crispy.





Fruit & vegetables – 3000 K–3500 K with enhanced red, green and blue components: fruit looks juicy, vegetables fresh and crunchy, and green tones particularly vivid.



TRACKLIGHT SPOT GU10

Clever by design. The TRACKLIGHT SPOT GU10 combines efficient LED technology with a robust die-cast aluminium housing and full compatibility with all LEDVANCE GU10 lamps. It's a practical, cost-effective solution for shops, hotels and exhibitions.



- FULL COMPATIBILITY works with all LEDVANCE GU10 lamps (on/off, dimmable, smart)
- GU10 BASE maximum application flexibility (lamps are not included)
- COST-EFFECTIVE ideal solution for retail and hospitality







TRACKLIGHT SPOT ZOOM DIM

Dimmable 3-phase tracklight spot with mechanical zoom lense and single CCT









PRODUCT FEATURES

- Mechanical zoom lens with a beam angle of 18° to 50°
- Dimmable (3% 100%) via potentiometer directly on each luminaire
- Color rendering index CRI 90
- Initial color consistency: ≤ 3 SDCM
- Rotation angle: 350°, tilt angle: 90°
- Durable die-cast aluminum housing
- Luminaire efficacy: up to 120 lm/W


PRODUCT BENEFITS

- Dimmable 3-phase tracklight spot with mechanical zoom lense
- No distraction from the illuminated objects thanks to the reduced design
- Low flicker light thanks to special electronic control gear
- Good glare reduction (UGR ≤ 19)


AREAS OF APPLICATION


- Direct replacement for luminaires using HID lamps
- Accent lighting
- Galleries, museums
- Shops, changing rooms, shop windows
- Hotels, restaurants

FURTHER PRODUCT DETAILS





























Product name ²	GTIN (EAN)	W	lm	lm/w ⁴	K	L70		L × W × H [mm] Ø × H [mm]	COLOR	Dimmable	Ø d [mm]
TR SP ZOOM DIM P 20W 930 WT	4099854 615924	20	2400 / 2000 ³	120 / 100	3000	50000	1850	189 x 72 x 256	White	Yes	72
TR SP ZOOM DIM P 20W 930 BK	4099854 615986	20	2400 / 2000 ³	120 / 100	3000	50000	1850	189 x 72 x 256	Black	Yes	72
TR SP ZOOM DIM P 20W 940 WT	4099854 616020	20	2400 / 2000 ³	120 / 100	4000	50000	1850	189 x 72 x 256	White	Yes	72
TR SP ZOOM DIM P 20W 940 BK	4099854 616068	20	2400 / 2000 ³	120 / 100	4000	50000	1850	189 x 72 x 256	Black	Yes	72
TR SP ZOOM DIM P 30W 930 WT	4099854 616082	30	3600 / 3000 ⁵	120 / 100	3000	50000	1850	189 x 80 x 260	White	Yes	80
TR SP ZOOM DIM P 30W 930 BK	4099854 616105	30	3600 / 3000 ⁵	120 / 100	3000	50000	1850	189 x 80 x 260	Black	Yes	80
TR SP ZOOM DIM P 30W 940 WT	4099854 616129	30	3600 / 3000 ⁵	120 / 100	4000	50000	1850	189 x 80 x 260	White	Yes	80
TR SP ZOOM DIM P 30W 940 BK	4099854 616143	30	3600 / 3000 ⁵	120 / 100	4000	50000	1850	189 x 80 x 260	Black	Yes	80

SAFETY ADVICE

Caution, risk of electric shock.

ductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously con-

SUPERIOR CLASS PERFORMANCE CLASS VALUE CLASS

TRACKLIGHT SPOT ZOOM DIM CCT

Dimmable 3-phase tracklight spot with mechanical zoom lense and CCT switch









PRODUCT FEATURES

- Multi Color function: 3000 K and 4000 K
- Mechanical zoom lens with a beam angle of 21° to 50°
- Dimmable (3% 100%) via potentiometer directly on each luminaire
- Color rendering index CRI 90
- Initial color consistency: ≤ 3 SDCM
- Rotation angle: 350°, tilt angle: 90°
- Durable die-cast aluminum housing - Luminaire efficacy: up to 120 lm/W


PRODUCT BENEFITS


- Dimmable 3-phase tracklight spot with mechanical zoom lense
- No distraction from the illuminated objects thanks to the reduced design
- Low flicker light thanks to special electronic control gear


AREAS OF APPLICATION

- Direct replacement for luminaires using HID lamps
- Accent lighting
- Galleries, museums
- Shops, changing rooms, shop windows
- Hotels, restaurants

FURTHER PRODUCT DETAILS









TR SP ZOOM DIM P 20W 93040 WT



















Product name ²	GTIN (EAN)	W	lm	lm/w	K	L70		L×W×H [mm] Ø×H [mm]	Ø d [mm]	COLOR	Dimmable
TR SP Z00M DIM P 20W 93040 WT	4099854 616181	20	1600 / 1300 ³	80 / 65 ⁴	3000 / 4000	50000	2150	189 x 72 x 256	72	White	Yes
TR SP Z00M DIM P 20W 93040 BK	4099854 616204	20	1600 / 1300 ³	80 / 654	3000 / 4000	50000	2150	189 x 72 x 256	72	Black	Yes
TR SP Z00M DIM P 30W 93040 WT	4099854 616235	30	2400 / 1800 ⁵	80 / 60 ⁶	3000 / 4000	50000	2150	189 x 80 x 260	80	White	Yes
TR SP ZOOM DIM P 30W 93040 BK	4099854 616259	30	2400 / 1800 ⁵	80 / 60 ⁶	3000 / 4000	50000	2150	189 x 80 x 260	80	Black	Yes

SAFETY ADVICE

Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously con-

SUPERIOR CLASS PERFORMANCE CLASS VALUE CLASS

TRACKLIGHT SPOT XR

3-phase tracklight spot with exchangeable relfector









PRODUCT FEATURES

- Compact tracklight spot with in-track control gear
- Rotation angle: 350°, tilt angle: 90°
- Available with color temperature 3000 K or 4000 K
- Color rendering index CRI 90
- Initial color consistency: ≤ 3 SDCM
- Equipped with reflectors with 24° beam angle
- Luminaire efficacy: up to 120 lm/W

PRODUCT BENEFITS

- Reflector easily replaceable thanks to bayonet catch and rubber suction pad
- No distraction from the illuminated objects thanks to the reduced design
- Low flicker light thanks to special electronic control gear
- Good glare reduction (UGR ≤ 19)


AREAS OF APPLICATION


- Direct replacement for luminaires using HID lamps
- Accent lighting
- Galleries, museums
- Shops, changing rooms, shop windows
- Hotels, restaurants


EQUIPMENT / ACCESSORIES


 Accessory reflectors with 15°, 36° or 50° beam angle available

FURTHER PRODUCT DETAILS









TR SP XR V 20W 930 24DEG WT















Product name ²	GTIN (EAN)	W	lm	lm/w	K	L70		L×W×H [mm] Ø×H [mm]	Ø d [mm]	COLOR
TR SP XR V 20W 930 24DEG WT	4099854 616273	20	2400	120	3000	50000	15 / 24 / 36 / 50	150 x 68 x 215	68	White
TR SP XR V 20W 930 24DEG BK	4099854 616297	20	2400	120	3000	50000	15 / 24 / 36 / 50	150 x 68 x 215	68	Black
TR SP XR V 20W 940 24DEG WT	4099854 616310	20	2400	120	4000	50000	15 / 24 / 36 / 50	150 x 68 x 215	68	White
TR SP XR V 20W 940 24DEG BK	4099854 616334	20	2400	120	4000	50000	15 / 24 / 36 / 50	150 x 68 x 215	68	Black
TR SP XR V 30W 930 24DEG WT	4099854 616365	30	3600	120	3000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	White
TR SP XR V 30W 930 24DEG BK	4099854 616389	30	3600	120	3000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	Black
TR SP XR V 30W 940 24DEG WT	4099854 616402	30	3600	120	4000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	White
TR SP XR V 30W 940 24DEG BK	4099854 616426	30	3600	120	4000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	Black

SAFETY ADVICE

TRACKLIGHT SPOT XR DALI

3-phase tracklight spot with exchangeable relfector and DALI-2 technology









PRODUCT FEATURES

- Compact tracklight spot with in-track DALI-2 driver
- Rotation angle: 350°, tilt angle: 90°
- Available with color temperature 3000 K or 4000 K
- Color rendering index CRI 90
- Initial color consistency: ≤ 3 SDCM
- Equipped with reflectors with 24° beam angle
- Luminaire efficacy: up to 120 lm/W

PRODUCT BENEFITS

- Reflector easily replaceable thanks to bayonet catch and rubber suction pad
- No distraction from the illuminated objects thanks to the reduced design
- Low flicker light thanks to special electronic control gear
- Good glare reduction (UGR ≤ 19)


AREAS OF APPLICATION


- Direct replacement for luminaires using HID lamps
- Accent lighting
- Galleries, museums
- Shops, changing rooms, shop windows
- Hotels, restaurants


EQUIPMENT / ACCESSORIES


 Accessory reflectors with 15°, 36° or 50° beam angle available

FURTHER PRODUCT DETAILS









TR SP XR DA V 30W 930 24DEG WT



















Product name ²	GTIN (EAN)	W	lm	lm/w	K	L70		L×W×H [mm] Ø×H [mm]	Ø d [mm]	COLOR
TR SP XR DA V 30W 930 24DEG WT	4099854 616549	30	3600	120	3000	50000	15 / 24 / 36 / 50	189 x 80 x 240	80	White
TR SP XR DA V 30W 930 24DEG BK	4099854 616693	30	3600	120	3000	50000	15 / 24 / 36 / 50	189 x 80 x 240	80	Black
TR SP XR DA V 30W 940 24DEG WT	4099854 616723	30	3600	120	4000	50000	15 / 24 / 36 / 50	189 x 80 x 240	80	White
TR SP XR DA V 30W 940 24DEG BK	4099854 616761	30	3600	120	4000	50000	15 / 24 / 36 / 50	189 x 80 x 240	80	Black

SAFETY ADVICE

Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance nected to the protective earthing conductor.

TRACKLIGHT SPECIAL FOOD LED

3-phase tracklight spot with special LED









PRODUCT FEATURES

- Compact tracklight spot with in-track control gear
- Rotation angle: 350°, tilt angle: 90°
- Luminaire efficacy: up to 95 lm/W
- Color rendering index CRI 90
- Equipped with reflectors with 24° beam angle
- Durable die-cast aluminum housing
- Available in matt white (like RAL9003), matt black (like RAL9005)


PRODUCT BENEFITS


- Specially tailored spectral distribution for food presentation only
- Reflector easily replaceable thanks to bayonet catch and rubber suction pad
- No distraction from the illuminated objects thanks to the reduced design
- Low flicker light thanks to special electronic control gear
- Good glare reduction (UGR ≤ 19)


AREAS OF APPLICATION


- Shops, supermarkets
- Food presentation in e.g. butchers, bakeries, supermarkets or meat processors
- Hotels, restaurants

FURTHER PRODUCT DETAILS









TR SP XR V 30W 924 24DEG BK BREAD













Product name ²	GTIN (EAN)	W	lm	lm/w	K	L70		L×W×H [mm] Ø×H [mm]	Ø d [mm]	COLOR
TR SP XR V 30W 924 24DEG BK BREAD	4099854 616907	30	2100	70	2400	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	Black
TR SP XR V 30W 924 24DEG WT BREAD	4099854 617089	30	2100	70	2400	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	White
TR SP XR V 30W 930 24DEG BK FRUIT	4099854 617102	30	2250	75	3000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	Black
TR SP XR V 30W 930 24DEG WT FRUIT	4099854 617126	30	2250	75	3000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	White
TR SP XR V 30W 730 24DEG BK MEAT	4099854 617164	30	1950	65	3000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	Black
TR SP XR V 30W 730 24DEG WT MEAT	4099854 617287	30	1950	65	3000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	White
TR SP XR V 30W 950 24DEG BK VEG	4099854 617508	30	2700	95	5000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	Black
TR SP XR V 30W 950 24DEG WT VEG	4099854 617706	30	2700	95	5000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	White
TR SP XR V 30W 950 24DEG BK SEAFOOD	4099854 617782	30	2700	95	5000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	Black
TR SP XR V 30W 950 24DEG WT SEAFOOD	4099854 617805	30	2700	95	5000	50000	15 / 24 / 36 / 50	150 x 80 x 240	80	White

SAFETY ADVICE

TRACKLIGHT SPOT REFLECTOR

Exchangeable reflector





PRODUCT FEATURES

- Accessory reflectors available in different beam angles (15°, 36°, 50°)

PRODUCT BENEFITS

- Clear cover protects the reflector against dust and contact
- High optical efficacy
- Reflector easily replaceable thanks to bayonet catch and rubber suction pad

AREAS OF APPLICATION

Suitable for TRACKLIGHT SPOT XR

GTIN (EAN)		L×W×H [mm] Ø×H [mm]	Ø d [mm]	COLOR
4099854 616785	15	63 x 41	63	Silver
4099854 616808	36	63 x 41	63	Silver
4099854 616822	50	63 x 41	63	Silver
4099854 616846	15	75 x 43	75	Silver
4099854 616860	36	75 x 43	75	Silver
4099854 616884	50	75 x 43	75	Silver
	4099854 616785 4099854 616808 4099854 616822 4099854 616846 4099854 616860	4099854 616785 15 4099854 616808 36 4099854 616822 50 4099854 616846 15 4099854 616860 36	4099854616785 15 63 x 41 4099854616808 36 63 x 41 4099854616822 50 63 x 41 4099854616846 15 75 x 43 4099854616860 36 75 x 43	4099854616785 15 63 x 41 63 4099854616808 36 63 x 41 63 4099854616822 50 63 x 41 63 4099854616846 15 75 x 43 75 4099854616860 36 75 x 43 75

TRACKLIGHT SPOT XR HIGH EFFICIENCY

3-phase tracklight spot with high efficient reflector









PRODUCT FEATURES

- Compact tracklight spot with high efficient reflector and in-track control gear
- Rotation angle: 350°, tilt angle: 90°
- Available with color temperature 3000 K or 4000 K
- Color rendering index CRI 90
- Initial color consistency: < 5 SDCM
- Equipped with reflectors with 24° beam angle
- Luminaire efficacy: up to 130 lm/W


PRODUCT BENEFITS


- No distraction from the illuminated objects thanks to the reduced design
- Low flicker light thanks to special electronic control gear
- Good glare reduction (UGR ≤ 19)

AREAS OF APPLICATION

- Direct replacement for luminaires using HID lamps
- Accent lighting
- Galleries, museums
- Shops, changing rooms, shop windows
- Hotels, restaurants

FURTHER PRODUCT DETAILS





TR SP XR HE V 30W 930 24DEG WT















Product name ²	GTIN (EAN)	W	lm	lm/w	K	L70		L×W×H [mm] Ø×H [mm]	Ø d [mm]	COLOR
TR SP XR HE V 30W 930 24DEG WT	4099854 616440	30	4000	130	3000	50000	24	150 x 80 x 240	80	White
TR SP XR HE V 30W 930 24DEG BK	4099854 616464	30	4000	130	3000	50000	24	150 x 80 x 240	80	Black
TR SP XR HE V 30W 940 24DEG WT	4099854 616488	30	4000	130	4000	50000	24	150 x 80 x 240	80	White
TR SP XR HE V 30W 940 24DEG BK	4099854 616501	30	4000	130	4000	50000	24	150 x 80 x 240	80	Black

SAFETY ADVICE

Caution, risk of electric shock.

TRACKLIGHT SPOT GU10

3-phase tracklight spot with GU10 socket base









PRODUCT FEATURES

- Base: GU10
- Rotation angle: 350°, tilt angle: 90°
- Durable die-cast aluminum housing
- Available in matt white (like RAL9003), matt black (like RAL9005)

PRODUCT BENEFITS

 Socket compatible for lamp power up to 10W

AREAS OF APPLICATION

- Shops, changing rooms, shop windows
- Hotels, restaurants





	Product name ²	GTIN (EAN)	L × W × H [mm] Ø × H [mm]	Ø d [mm]	COLOR
NEW	TR SP HOUSING E GU10 BK	4099854 590009	58 x 58 x 58 x 145	58	Black
NEW	TR SP HOUSING E GU10 WT	4099854 590023	58 x 58 x 58 x 145	58	White

SAFETY ADVICEAll electrical connections must be made by a

ABOUT LEDVANCE

With business activities in over 140 countries, LEDVANCE is one of the world's leading general lighting companies. Emerging from OSRAM's general lighting division, LEDVANCE's portfolio includes LED lamps and luminaires, intelligent lighting products, traditional lamps and renewable energy solutions.

#POWERTHROUGHLIGHT



LEDVANCE GmbH Parkring 1-5 85748 Garching Germany