TRACKLIGHT LINEAR DALI

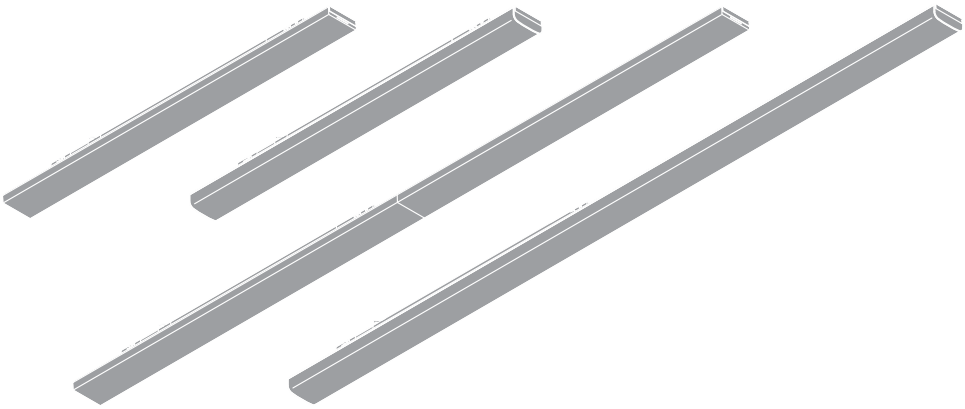

	EAN	l x b x h [mm]	W	V_{AC}	Hz	lm	lm/W	K
TR LN 750 DA P 35W ML 840 DA25 WT	4099854903083	736 x 65 x 57	35*	220-240	50/60	6300	180	4000
TR LN 750 DA P 35W ML 840 DA25 BK	4099854903106	736 x 65 x 57	35*	220-240	50/60	6300	180	4000
TR LN 750 DA P 35W ML 840 SY90 WT	4099854903120	736 x 65 x 57	35*	220-240	50/60	6300	180	4000
TR LN 750 DA P 35W ML 840 SY90 BK	4099854903144	736 x 65 x 57	35*	220-240	50/60	6300	180	4000
TR LN 1500 DA P 65W ML 840 DA25 WT	4099854903168	1472 x 65 x 57	65**	220-240	50/60	11700	180	4000
TR LN 1500 DA P 65W ML 840 DA25 BK	4099854903182	1472 x 65 x 57	65**	220-240	50/60	11700	180	4000
TR LN 1500 DA P 65W ML 840 SY90 WT	4099854903205	1472 x 65 x 57	65**	220-240	50/60	11700	180	4000
TR LN 1500 DA P 65W ML 840 SY90 BK	4099854903229	1472 x 65 x 57	65**	220-240	50/60	11700	180	4000
TR LN 750 DA P 35WML 840 SY120 OP WT	4099854903243	736 x 65 x 69	35*	220-240	50/60	5425	155	4000
TR LN 750 DA P 35WML 840 SY120 OP BK	4099854903267	736 x 65 x 69	35*	220-240	50/60	5425	155	4000
TR LN 1500 DA P 65WML840 SY120 OP WT	4099854903281	1472 x 65 x 69	65**	220-240	50/60	10075	155	4000
TR LN 1500 DA P 65WML840 SY120 OP BK	4099854903304	1472 x 65 x 69	65**	220-240	50/60	10075	155	4000

	EAN	IP	IK	▽	R_a	(°C)	PF	
TR LN 750 DA P 35W ML 840 DA25 WT	4099854903083	20	03	DA25°	>80	-20...+40	>0.9	1.07 kg
TR LN 750 DA P 35W ML 840 DA25 BK	4099854903106	20	03	DA25°	>80	-20...+40	>0.9	1.07 kg
TR LN 750 DA P 35W ML 840 SY90 WT	4099854903120	20	03	SYM90°	>80	-20...+40	>0.9	1.07 kg
TR LN 750 DA P 35W ML 840 SY90 BK	4099854903144	20	03	SYM90°	>80	-20...+40	>0.9	1.07 kg
TR LN 1500 DA P 65W ML 840 DA25 WT	4099854903168	20	03	DA25°	>80	-20...+40	>0.9	1.90 kg
TR LN 1500 DA P 65W ML 840 DA25 BK	4099854903182	20	03	DA25°	>80	-20...+40	>0.9	1.90 kg
TR LN 1500 DA P 65W ML 840 SY90 WT	4099854903205	20	03	SYM90°	>80	-20...+40	>0.9	1.90 kg
TR LN 1500 DA P 65W ML 840 SY90 BK	4099854903229	20	03	SYM90°	>80	-20...+40	>0.9	1.90 kg
TR LN 750 DA P 35WML 840 SY120 OP WT	4099854903243	20	03	SYM120°	>80	-20...+40	>0.9	1.01 kg
TR LN 750 DA P 35WML 840 SY120 OP BK	4099854903267	20	03	SYM120°	>80	-20...+40	>0.9	1.01 kg
TR LN 1500 DA P 65WML840 SY120 OP WT	4099854903281	20	03	SYM120°	>80	-20...+40	>0.9	1.80 kg
TR LN 1500 DA P 65WML840 SY120 OP BK	4099854903304	20	03	SYM120°	>80	-20...+40	>0.9	1.80 kg

*	W	35	31	27	23	20
750 DA	lm	6300	5580	4860	4140	3600
	lm/W	180	180	180	180	180
	mA	165	150	135	120	105
750 DA OPAL	lm	5425	4805	4185	3565	3100
	lm/W	155	155	155	155	155
	mA	165	150	135	120	105

**	W	65	57	50	43	36
1500 DA	lm	11700	10260	9000	7740	6480
	lm/W	180	180	180	180	180
	mA	290	260	230	200	170
1500 DA OPAL	lm	10075	8835	7750	6665	5580
	lm/W	155	155	155	155	155
	mA	290	260	230	200	170

TRACKLIGHT LINEAR DALI

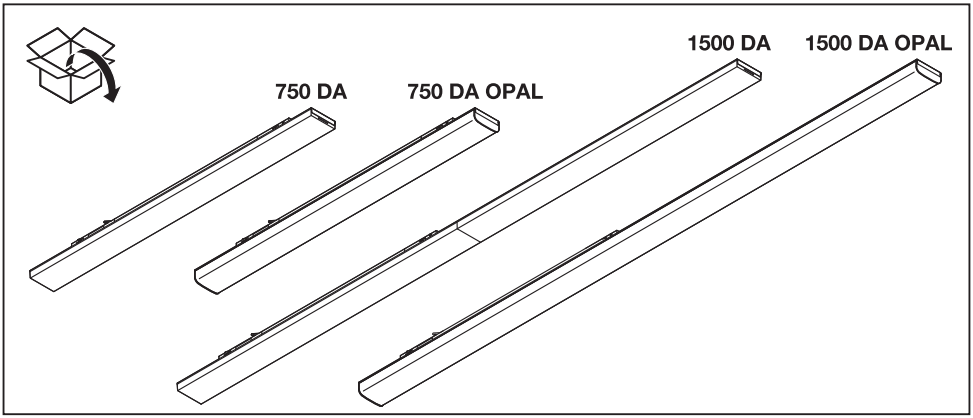

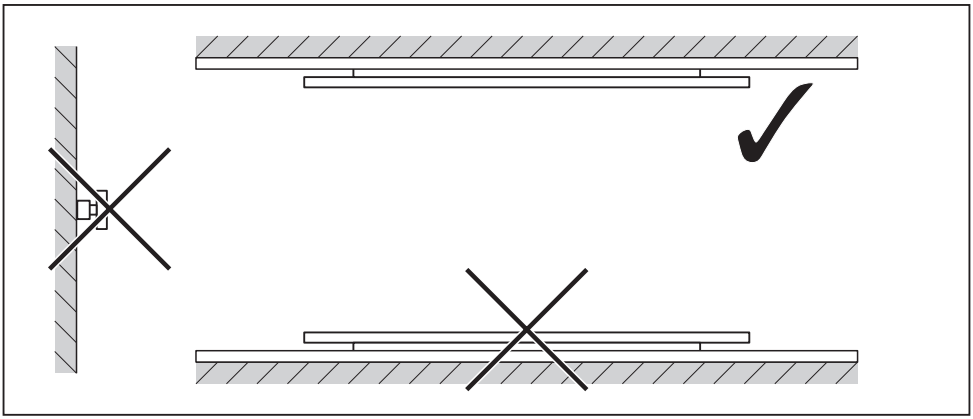

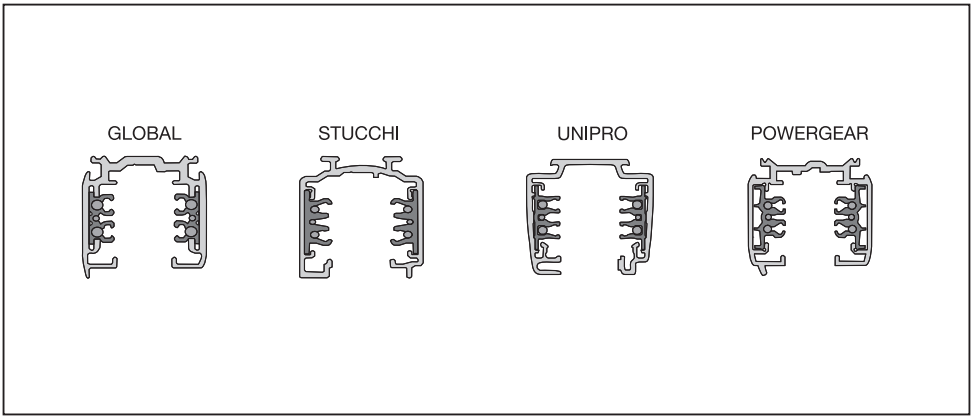

TRACKLIGHT LINEAR DALI

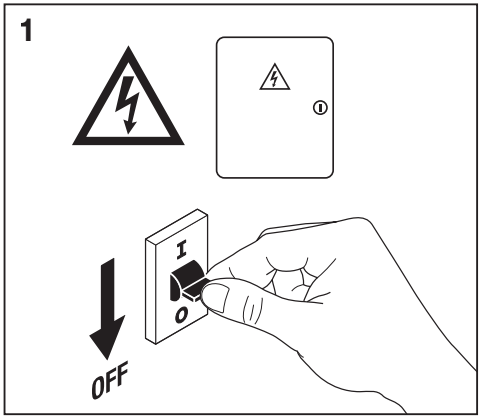

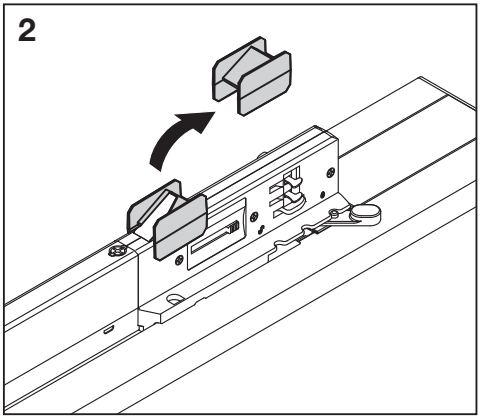

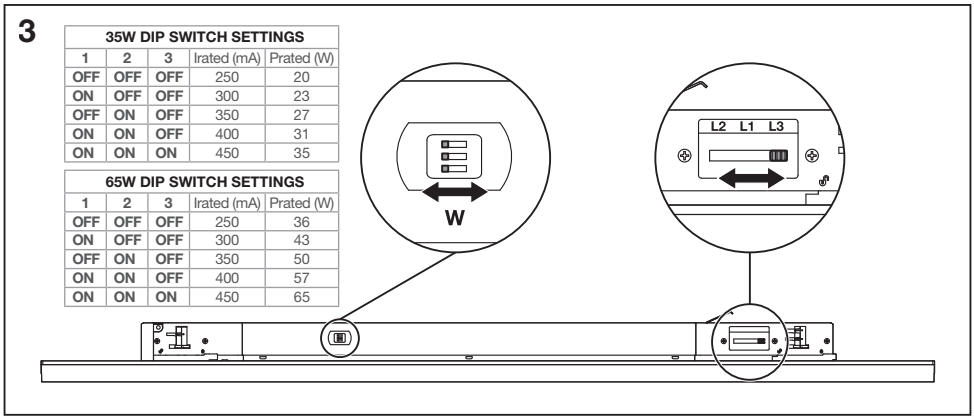

35W DIP SWITCH SETTINGS				
1	2	3	Irated (mA)	Prated (W)
OFF	OFF	OFF	250	20
ON	OFF	OFF	300	23
OFF	ON	OFF	350	27
ON	ON	OFF	400	31
ON	ON	ON	450	35

65W DIP SWITCH SETTINGS				
1	2	3	Irated (mA)	Prated (W)
OFF	OFF	OFF	250	36
ON	OFF	OFF	300	43
OFF	ON	OFF	350	50
ON	ON	OFF	400	57
ON	ON	ON	450	65

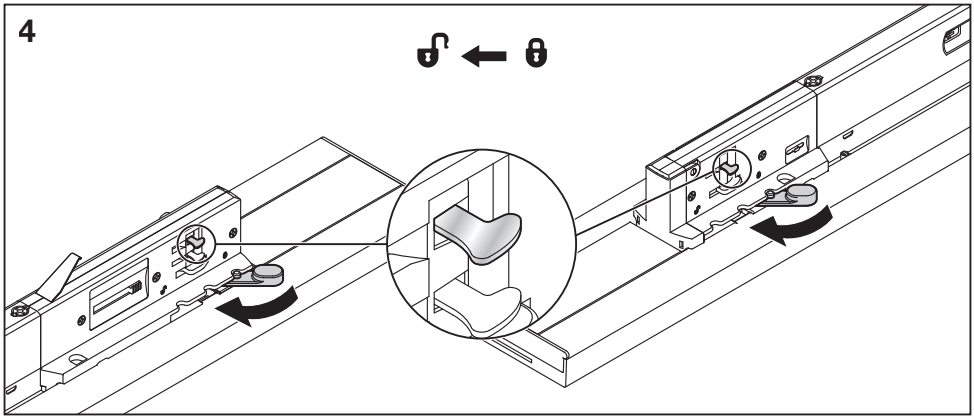

5

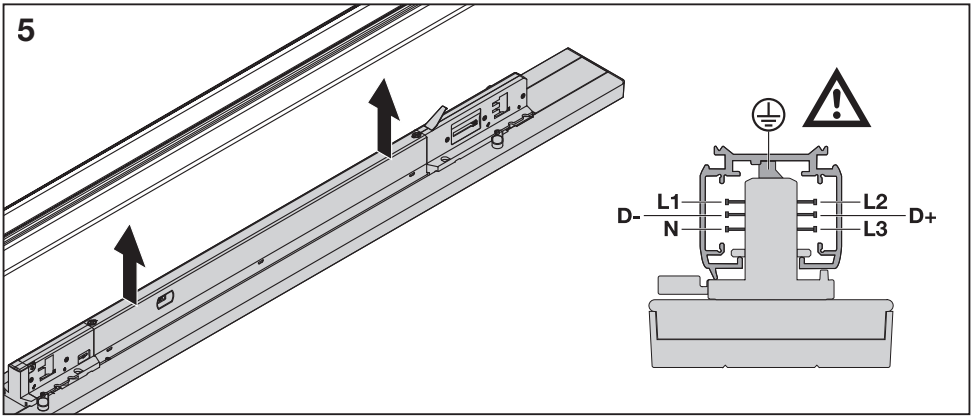

6

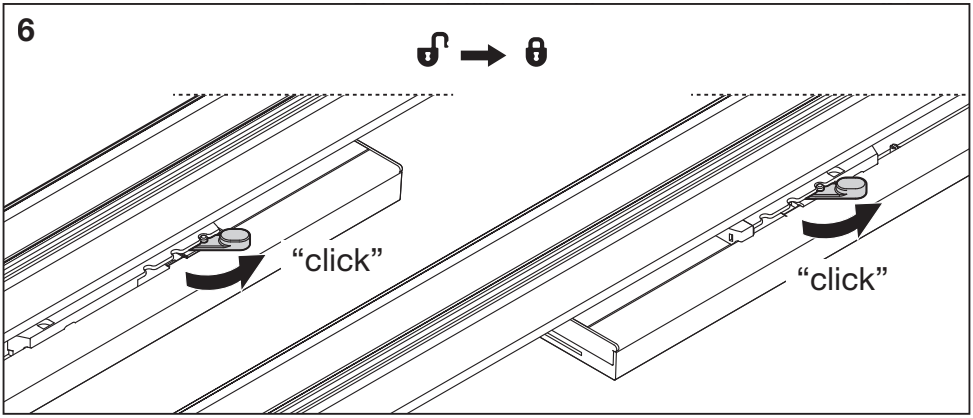

7

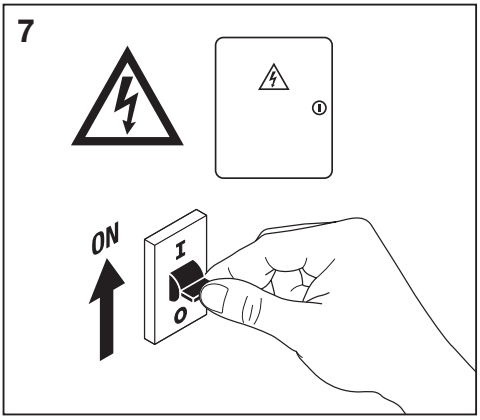

TRACKLIGHT LINEAR DALI



C10449058
G11291815
15.06.26

LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com

GB LEDVANCE Ltd, Sterling House,
810 Mandarin Court, Warrington,
Cheshire, WA1 1GG, United Kingdom